



2000 BI-PART

External sliding panels breakout only

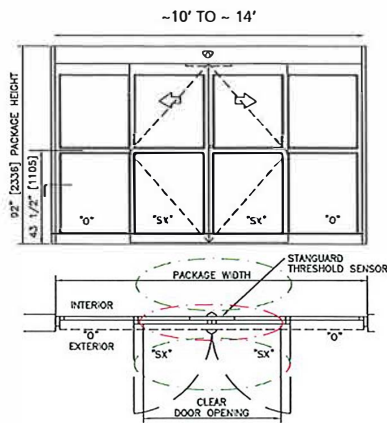


2000 SINGLE SLIDE

Left Hand Shown

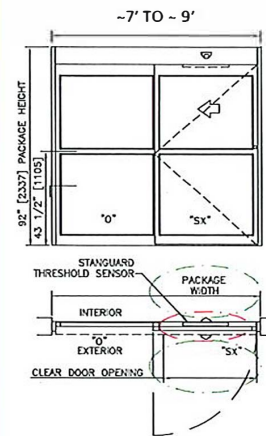


3000 BI-PART

All panels break out

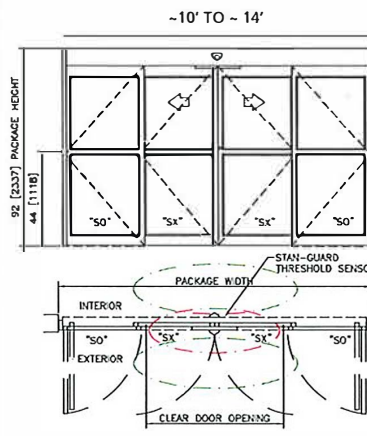

3000 SINGLE SLIDE

Left Hand Shown

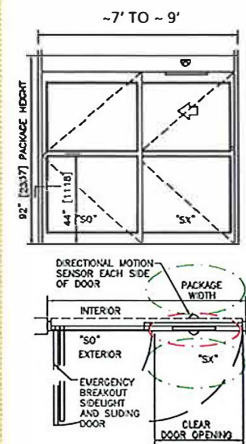

Standard package shown. Contact your local STANLEY Representative for custom designs and larger dimensions.

	SPECIFICATIONS		OPTIONS
DESIGN	Single Slide or Bi-part		
BREAKOUT	SX Panel on the 2000, SX and SO panels on the 3000		
TYPICAL HEIGHT	7'-8" (2.3m), Clear Door Opening of 6'-11" (2.1m)		Taller options available. Consult your local SAT representative
TYPICAL WIDTH	SINGLE SLIDE (narrow stiles): 7' to 9' (2.1 to 2.7m), CDO width 35 1/4" - 47 1/4" (896mm - 1201mm) 2000 EBO: 39" - 51" (991mm - 1296mm). 3000 EBO: 75" - 99" (1905mm - 2515mm)	FORMULA (narrow stiles): CDO = 1/2 package width - 6.7"	Wider options available. Consult your local SAT representative.
		Emergency BO width = CDO + 3.8" (2000 model). Package width - 9.0" (3000 model)	
	BI-PART (narrow stiles): 10' to 14' (3.0m - 4.3m), CDO width: 48 1/4" - 72 1/4" (1227mm - 1836mm) 2000 EBO: 55 1/2" - 79 1/2" (1411mm - 2021mm). 3000 EBO: 105 1/2" - 153 1/2" (2680mm - 3899mm)	FORMULA (narrow stiles): CDO = 1/2 package width - 11.7"	
		Emergency BO width = CDO + 7.3" (2000 model). Package width - 14.5" (3000 model)	
HEADER SIZE	8" (203mm) High x 6" (152mm) Deep		
JAMB DIMENSION	1 3/4" x 4 1/2"		1 3/4" x 6"
STILES	Narrow 2"		Medium 3 1/2"
TYPICAL DOOR PANEL WEIGHT	Up to 220 Pounds Each (100kg)		Heavier options available
DOOR PANEL MATERIALS	Aluminum		All glass or custom
POWER REQUIRED	120 VAC, 50/60 HZ, 5 Amps Minimum		
DRIVE SYSTEM	1/4 HP DC Motor, Gear Drive, Toothed belt		Twin 1/4 HP DC Motors
CONTROLS	Rocker Switch		Rotary, Keyed Rotary, Eco Pro
CONTROLLER	Microprocessor based with position encoder		
MUNTIN	One 2" muntin		4 1/4", Multiple
ACTIVATION SENSORS	2 SU-100 motion sensors		Activation sensors, mats, push button controls, wall plates, radio control
SAFETY SENSORS	1 Stan-Guard® and 2 Doorway Holding Beams		Combination sensors and mats
TEMPERATURE RATING	-30F to 130F		
GLASS	1/4"		1/2", 5/8" or 1"
TRANSOM	Configurable Verticals and/or Horizontals		
SPEED RANGE	Closing Speeds: 0.5' - 1.5 per sec per ANSI. Opening Speeds: 0.5' - 2.5' per sec.		
CODES AND STANDARDS	UL, cUL, ANSI A156.10, IBC, UBC, BOCA, ICBO, NFPA 101		